


### LED Street Light Installation Instruction

#### Due tipi di installazioni

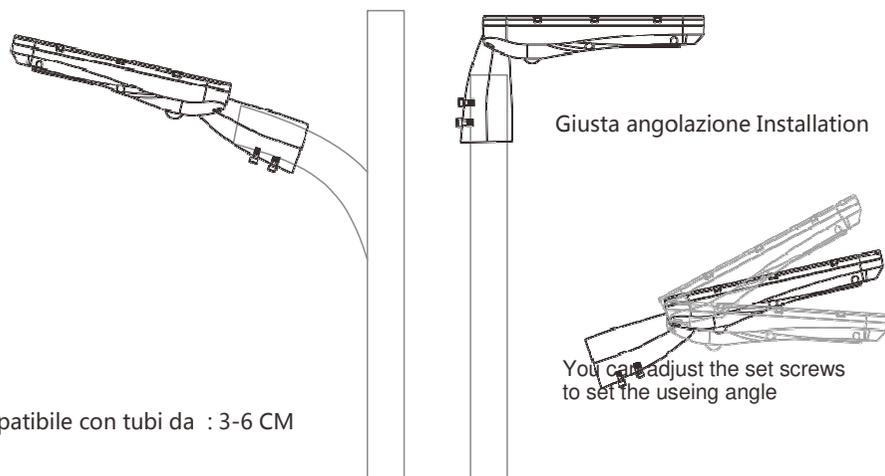

Giusta angolazione Installation

You can adjust the set screws to set the using angle

Compatibile con tubi da : 3-6 CM

Before installation, please read the instruction manual carefully and keep it for future use.



Warning

1. The operating personnel must have the related certifications, knowledge and work experience. Work allocation must be made according to each personnel's position and responsibility.
2. Lens of the street light modules are made of optically tempered glass, any careless handling would scratch the lens. So in the process of installation, the street lights must be carefully protected. In the case of street light face faces the ground, it must be protected with soft cloth or other protective materials.
3. Any installation mustn't be proceeded unless all the powers are off.
4. Installation must be carried out strictly according to the operation specifications, including use of relevant tools and equipments. For example: the working range, warning labels, flash lamp, helmet, and work clothes etc.
5. In the process of installation, please ensure the weather are suitable for outdoor high electric power working.

Prima carica piena necessita circa 8-9ore con il sole buono  
 Funziona con la prima modalit  fino 60ore circa  
 Sempre accesa in modalit  2 dura circa 30ore.


Dopo una carica piena funziona anche per 2 - 4 notti con maltempo durante il giorno.

#### Installation of LED Street Lights

Step 1: Start installation of the street light  
 Turn the street light to the back side, loose the 3 screws on the swivel



Step 3: Fixation of the LED Street Lights  
 Install the street light to the lamp pole, adjust the LED street light to be of horizontal level. Fasten the 3 screws on the swivel

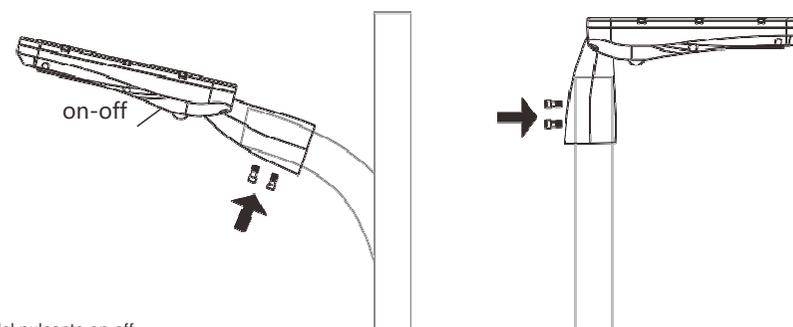

Istruzioni del pulsante on-off

La prima volta Premendo il pulsante 5 secondi e si apre la prima modalit : si accende piena luminosit  quando rileva un movimento e poi dopo 30secondi circa si spegne (non si spegne se rileva altri movimenti durante il timer di 30 secondi); secondo modo premere una volta il tasto rosso e si apre la seconda modalit : si accende in piena luminosit  quando rileva il movimento e poi resta accesa con luminosit  dimezzata fino 5h successive, dopo 5h ritorna in automatico alla prima modalit .  
 Premere per la terza volta si spegne ogni funzione, quindi modalit  spenta.



detection distance 8-10M

altezza installazione consigliato: 2.5-5m



max:10m